

MAXXON®
COMMERCIAL

EZ Crete™



**EASY PREP.
EASY RESURFACING.
EASY ON THE BUDGET.**

Maxxon® Commercial EZ Crete is the low-prep, affordable choice for depth correction and resurfacing of interior gypsum, concrete and lightweight concrete subfloors.

- More than 140 UL and ULC fire-resistance rated designs
- Ideal for deeper installations
- Ready for foot traffic in 2 to 4 hours
- Provides a smooth, flat surface, compatible with virtually all floor coverings
- GREENGUARD Gold Certified

WHERE TO USE

Application

Multifamily/light commercial wood frame and pre-cast, poured-in-place, and pre-stressed concrete construction and renovation.

Subfloor

Interior gypsum, concrete, wood.

MINIMUM
4,000
PSI

BENEATH IT ALL, MAXXON DELIVERS.™

DEEP FILLS TO THIN POURS.

For leveling, smoothing and repairing, Maxxon Commercial EZ Crete is the versatile, cost-effective underlayment that easily tackles deep fills while also accommodating thinner pours. It ensures a smooth, durable, fire-resistant surface, with a minimum compressive strength of 4,000 psi (27.6 MPa). With minimal prep, Maxxon Commercial EZ Crete installs from 3/8 inch to 3 inch depths and delivers a flat surface that's ready for virtually any floor covering.

PRODUCT INFORMATION

Compressive Strength (Modified ASTM C472)	Minimum 4,000 psi (27.6 MPa)
Installation Depths	Over concrete: 3/8 in.–3 in. (10–76 mm) Over wood: 3/4 in.–3 in. (19–76 mm) For deeper pours, contact Maxxon
Dry Density	115–125 lbs/ft ³ (1,842–2,002 kg/m ³)
Fire Performance (ASTM E84)	Flame spread: 0 Fuel contribution: 0 Smoke development: 0
Coverage (per 50 lb bag)	3/8 in. (10 mm): 16 ft ² (1.49 m ²) 1/2 in. (13 mm): 12 ft ² (1.11 m ²) 3/4 in. (19 mm): 8 ft ² (0.74 m ²)

INSTALLATION & LIMITATIONS

See technical data sheet available at Maxxon.com for complete installation instructions and limitations.

PACKAGING


50 lbs (22.7 kg)

FIRE RATINGS

Underwriters Laboratory International UL ER #8477-01. See technical data sheet for complete UL and fire assembly information.

PRO TIP

Easy to use: just clean, prime and pour.

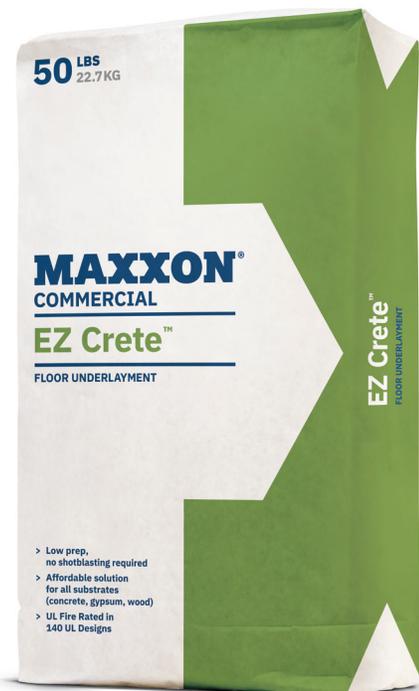

Maxxon Corporation
920 Hamel Road PO Box 253
Hamel, Minnesota 55340
800-238-8461
maxxon.com
info@maxxon.com

@Maxxon.Corporation
 maxxon-corporation