

MAXXON®

Gyp-Crete®

2000

Multifamily



Products for
approved Maxxon
applicators



THE PERFECT PARTNER FOR MULTIFAMILY WOOD SUBFLOORS.

Maxxon® Gyp-Crete® 2000 Multifamily is the trusted choice for interior wood subfloors, delivering fire safety, sound attenuation and high compressive strengths.

- Ideal for wood-frame multifamily and light commercial construction
- 2,000–3,200 psi compressive strength and excellent flow properties
- More than 140 UL and ULC fire-resistance rated designs
- Superior sound attenuation when used with Maxxon® Acousti-Mat®
- GREENGUARD Gold Certified

BENEATH IT ALL, MAXXON DELIVERS.™

WHERE TO USE

Application

Multifamily, light commercial, commercial wood-frame and pre-cast, poured-in-place and pre-stressed concrete construction, concrete repair/renovation and steel decks.

Subfloor

Interior wood, concrete, steel.

TYPICAL RANGE:
2,000-3,200
PSI

MAXXON®

Gyp-Crete® 2000 Multifamily



Products for
approved Maxxon
applicators


BETTER FLOW FOR BETTER FLOORS.

When it comes to wood-frame construction, Maxxon Gyp-Crete 2000 Multifamily goes beyond compressive strength, fire safety and sound control. The enhanced formulation ensures better flow, creating a strong, smooth surface that easily accommodates a variety of modern floor coverings.

Poured to a minimum of ¾ inch over wood and ready for foot traffic in as little as 90 minutes after application, Gyp-Crete 2000 Multifamily streamlines your construction schedule. As the premier option for wood subfloors, this underlayment provides a robust compressive strength of 2,000 to 3,200 psi and enhanced resistance to surface abrasion. It's the trusted solution for high-quality, fire-resistant floors.

PRODUCT INFORMATION

Compressive Strength (Modified ASTM C472)	Typical range: 2,000–3,200 psi (13.8–22.1 MPa)
Installation Depths	¾ in.–3 in. (19–76 mm) For deeper pours, contact Maxxon
Dry Density	110–120 lbs/ft ³ (1762–1922 kg/m ³)
Fire Performance (ASTM E84)	Flame spread: 0 Fuel contribution: 0 Smoke development: 0

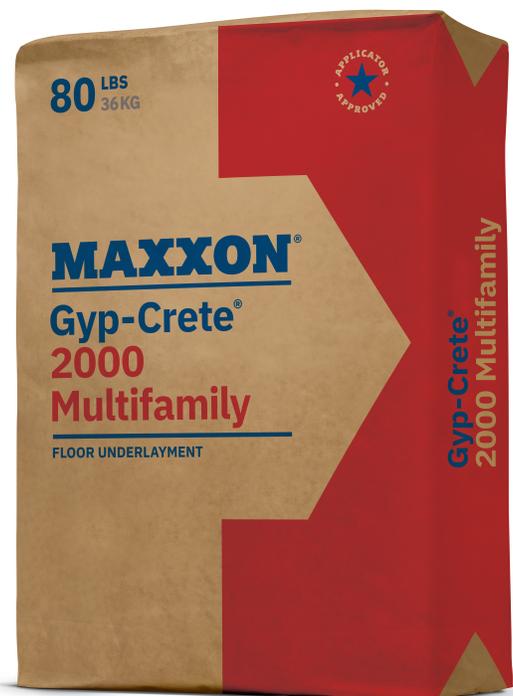

INSTALLATION & LIMITATIONS

See technical data sheet available at maxxon.com for complete installation instructions and limitations.

PACKAGING

80 lbs (36 kg)

FIRE RATINGS

Underwriters Laboratory International UL ER #8477-01. See technical data sheet for complete UL and fire assembly information.

LEED INFORMATION

For information regarding how Gyp-Crete 2000 Multifamily may earn points toward LEED certification, contact us at 800-356-7887 or visit www.maxxon.com/go_green.

PRO TIP

Installing Gyp-Crete 2000 Multifamily after drywall seals room perimeters, keeping noise right where it should be.



Maxxon Corporation

920 Hamel Road PO Box 253
Hamel, Minnesota 55340
800-356-7887

maxxon.com

info@maxxon.com

@Maxxon.Corporation

maxxon-corporation